


Valley Flashing

NuWave Corrugated & U-Panel

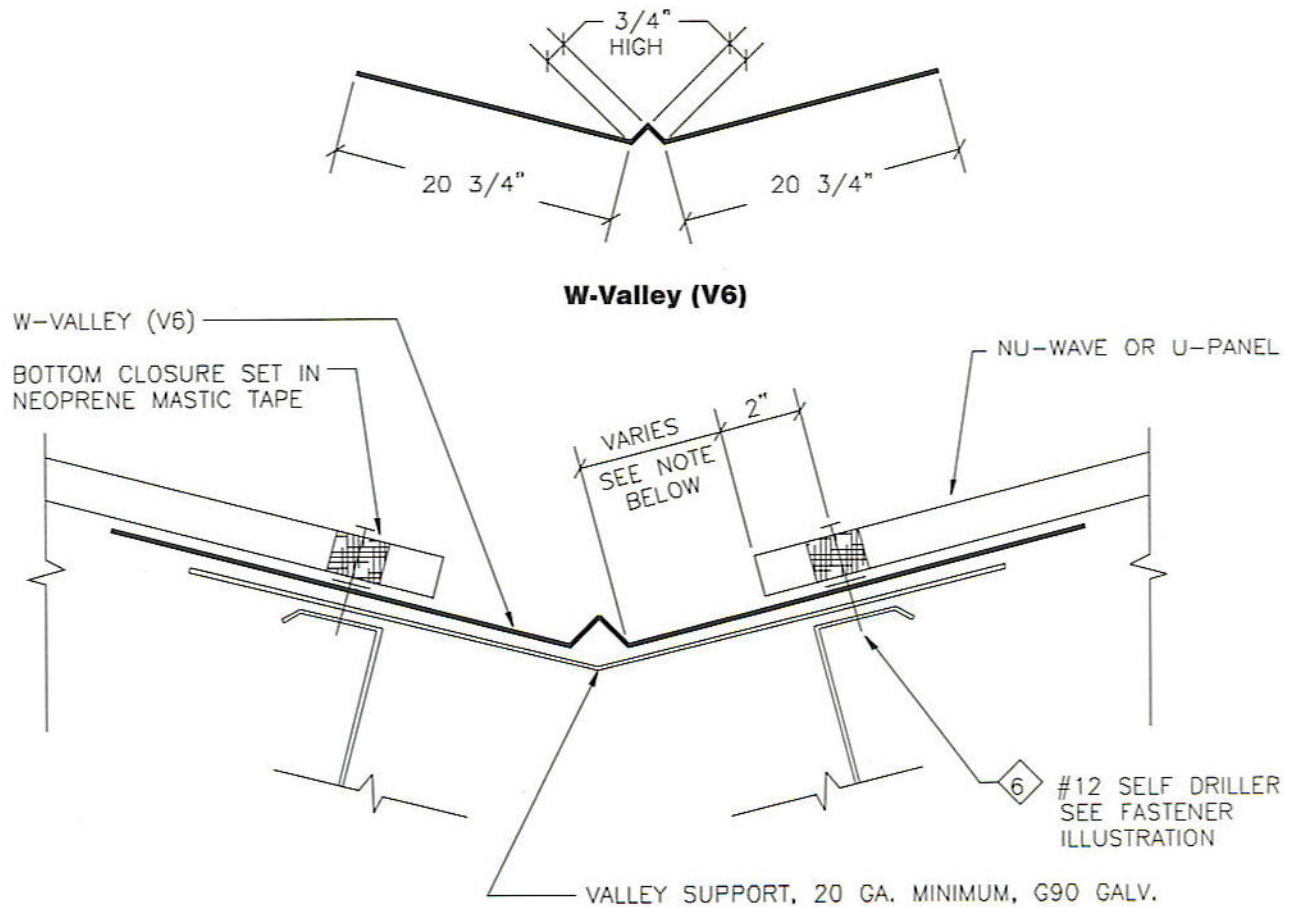

Note:

- Valley dimensions must be the proper width to account for slope, snow, ice and heavy rain conditions. An underlayment such as a rubberized cold-applied membrane is recommended extending a minimum of 3'-0" up from the center of the valley on each side.
- Special ordered beveled closures available for a specific pitch/slope.