


HR-36™ Roof & Wall

18-24 Gauge Architectural Panels


Featuring

Zincalume® For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of zinc coatings.

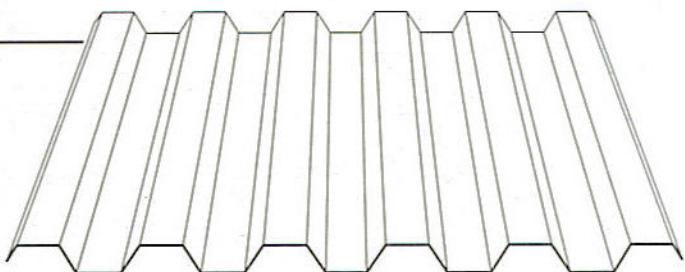

HR-36 Roof & Wall (Typical Roof Application)

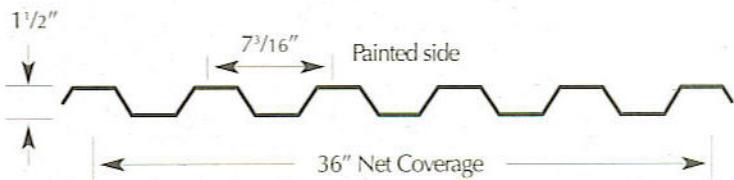

HR-36™ Roof & Wall is a through-fastened metal panel with 36" net coverage. HR-36™ Roof & Wall is predominantly used in industrial and commercial applications.

- Wider coverage means fewer panels to handle and install, saving time and money.
- Long spanning capability: or design provides superior load and span capacities, saving money in structural support.
- Quick, economical trim packages available as standard trim pieces and can be ordered by number.
- Crimp curving available for a unique appearance.
- 24 gauge through 18 gauge panels available with DuraTech™5000 (polyvinylidene fluoride) coating system, ZACtique®II treatment or Zincalume® Plus*. 18, 20 and 22 gauge panels require longer lead times.
- Fiberglass panels are available to match the profile of the metal panels.

HR-36 Roof & Wall Section Properties					
Gauge	Wt. (lbs/ft ²)	S+ (in ³ /ft)	I+ (in ⁴ /ft)	S- (in ³ /ft)	I- (in ⁴ /ft)
24	1.20	.1234	.1116	.1156	.1141
22	1.53	.1711	.1504	.1601	.1544
20*	1.85	.2229	.1907	.2085	.1964
18*	2.46	.3264	.2633	.3055	.2721

*18 and 20 gauge supplied as G-90 galvanized.