


STANDARD CORRUGATED

The standard for roofing and siding for years. Available in lengths from four feet to thirty-six feet at no extra cost.

Custom rolling to your length eliminates wasteful lapping of sheets and allows flexible spacing of girts and purlins.

*Available in Beige & White.
Other colors available.*

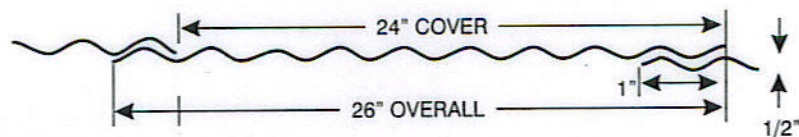

STD. CORRUGATED

MATERIAL SPECIFICATIONS - ASTM A 792-94, AZ50, 50B MIN YIELD 50KSI

Max Span

Allowable Load For Spans Shown (lbs/sq ft) Live Load = 20 lbs/sq ft

GA	WT LB/SQ FT	S IN ³	I IN ⁴	2.0"	2.6"	3.0"	3.6"	4.0"	4.6"	5.0"	SIMPLE	MULTI
30	0.70	.0168	.0043	103	67	45	21	12	-	-	3-0	3-6
28	0.80	.0207	.0053	129	82	49	36	15	11	-	3-3	3-9
26	0.90	.0245	.0063	153	98	61	40	26	14	-	3-7	4-2
24	1.20	.0317	.0083	198	126	80	52	36	21	14	4-0	4-6

Load Table is based on $\frac{WL^2}{10}$ or Maximum Deflection $L/120$. For single spans reduce table values by 20%