


Select Seam®

Featuring

Zincalume® For Twice the Life!


Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

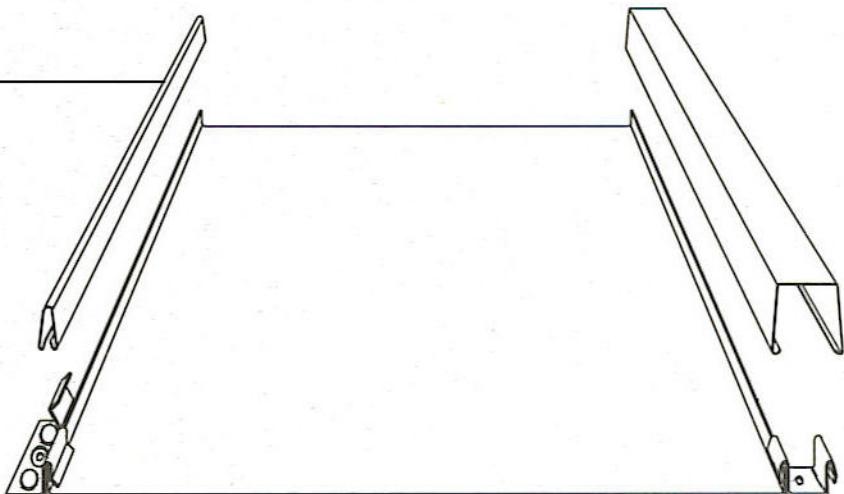

Select Seam is a performance-rated, non-structural, batten seam metal roof system. It's clean wide pan appearance makes it ideal for a classic architectural effect.

- Available in narrow batten and wide batten in the following net coverages:
 - Narrow Batten: 16 1/4" coverage
 - 21 1/4" coverage
 - Wide Batten: 17 1/2" coverage
 - 22 1/2" coverage

- UL580-Class 90 wind uplift rated.
- Narrow Batten tested for air infiltration per ASTM E1680 and water infiltration per ASTM 1646 (with field applied sealant).
- 24 gauge Zincalume® clips.
- Narrow batten panels can be field curved for radius applications (see reverse side).
- Panels are factory corrective-leveled.
- Preformed flashing and matching flat sheet available.

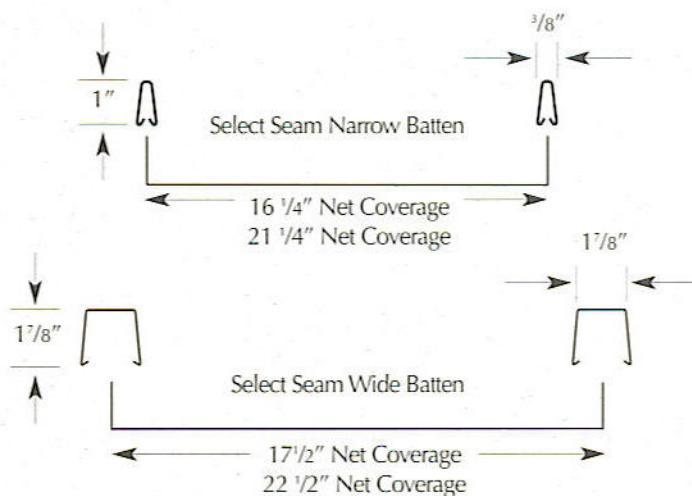

- Offered in a range of finishes including:
 - 24 gauge Zincalume® with the DuraTech™5000 (polyvinylidene fluoride) coating system.
 - Unpainted Zincalume® Plus.
 - Real 16 oz. copper.
 - ZACtique® II treatment.
- Available in tapered panels for special architectural applications.
- Ideal for both new and retrofit roof applications.
- Flashing details and CSI guide specification available.
- Narrow and Wide Battens can be alternated for a unique appearance.

Weight, lbs/Sq. ft.
24 ga. 22 ga.

16 1/2" Coverage	1.16	1.46
21 1/4" Coverage	1.11	1.39
17 1/2" Coverage	1.24	1.56
22 1/2" Coverage	1.17	1.49