


# Curved Select Seam<sup>®</sup>

Featuring

**Zincalume<sup>®</sup>** For Twice the Life!

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

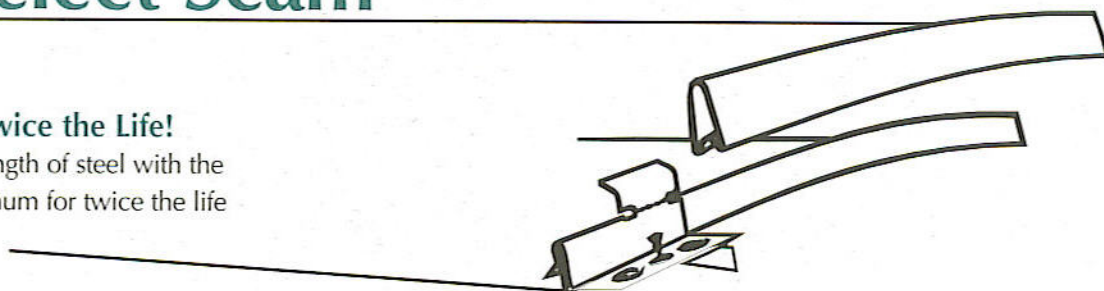

**C**urved Select Seam is a performance-rated, non-structural, batten seam metal roof system that can be curved for radius applications.



Narrow Batten

- ☐ Available in narrow batten in the following net coverages:

Narrow Batten: 16 1/4" coverage

21 1/4" coverage

- ☐ Curving Options:

- Convex Curves: Narrow Batten 24 ga. can be field curved to a minimum 4' radius.
- Concave Curves: Narrow Batten 24 ga. can be curved to a minimum 25' radius.

- ☐ Offered in a range of finishes including:

- 24 gauge Zincalume<sup>®</sup> with the DuraTech<sup>™</sup>5000 (polyvinylidene fluoride) coating system.
- Unpainted Zincalume<sup>®</sup> Plus.
- Real 16 oz. copper.
- ZACTique<sup>®</sup>II treatment

- ☐ Panels are factory corrective-leveled.

- ☐ Zincalume<sup>®</sup> coated clips.

- ☐ Special underlayment is required on curved applications at areas with less than 3:12 slope.

Weight, lbs/Sq. ft.

	24 ga.	22 ga.
16 1/4" Coverage	1.16	1.46
22 1/4" Coverage	1.11	1.39