


# Nu-Wave® Corrugated


Featuring  
**Zincalume® For Twice the Life!**

Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

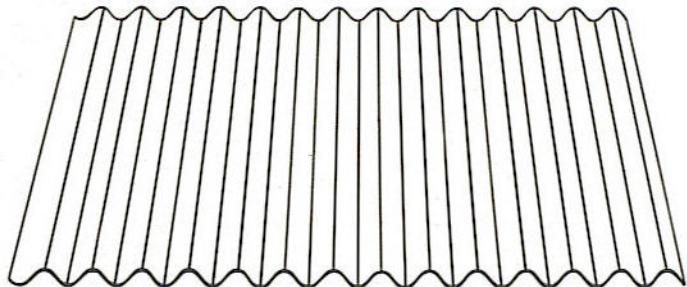

**N**u-Wave® Corrugated is a through-fastened metal panel with 7/8" deep corrugations. The panel measures 36" out-to-out, with a 32" net coverage for roof applications and a 34 2/3" net coverage for wall application

- Deep corrugations provides bold aesthetic shadow effects in application.
- 20, 22, and 24 gauge are offered factory curved to save time and money on the job site, product arrives ready to install; also allows a variety of looks to meet the aesthetic needs of a project.
- Available in a variety of 24 gauge DuraTech™5000 (polyvinylidene fluoride) colors, ZACtique®II treatment, or 26 gauge is available in the DuraTech™nt coating system. All gauges include Zincalume® Plus as an unpainted option. 20 and 22 gauge panels require longer lead times.
- High tensile-steel in 26 gauge.
- Quick, economical trim packages available as standard trim pieces that can be ordered by number.
- Strength of design allows longer spanning or greater allowable loads.
- Fiberglass skylight panels are available to match the profile of the metal panels.

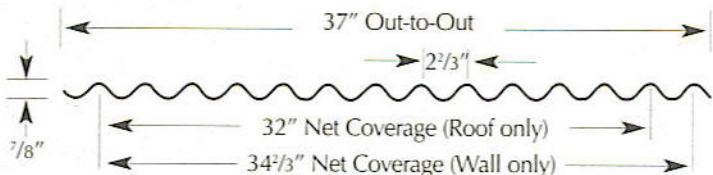

Nu-Wave® Corrugated Section Properties					
Gauge	Wt. (lbs/ft <sup>2</sup> )	S+ (in <sup>3</sup> /ft)	I+ (in <sup>4</sup> /ft)	S- (in <sup>3</sup> /ft)	I- (in <sup>4</sup> /ft)
26	1.03	.0608	.027	.0602	.027
24	1.58	.0805	.036	.0798	.036
22	1.89	.0999	.045	.0991	.045
20	2.52	.1191	.054	.1181	.054