


Reversed Box Rib™

Roof or Wall Application
18 to 29 gauge

Featuring
Zincalume® For Twice the Life!


Zincalume combines the strength of steel with the corrosion resistance of aluminum for twice the life of most zinc coatings.

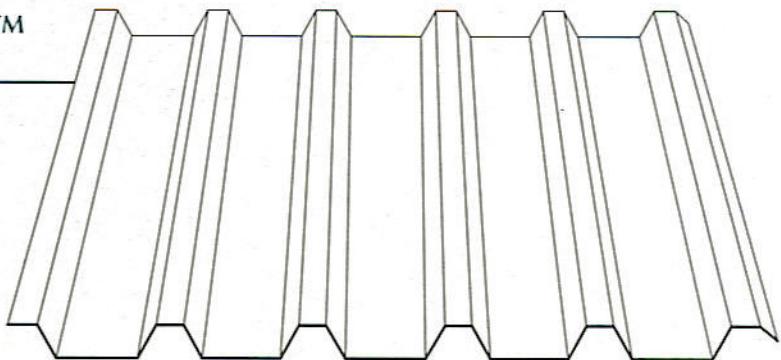

Reversed Box Rib is a through-fastened metal panel with full 36" net coverage and is ideal for industrial roof and wall applications.

- Wider coverage means fewer panels to handle and install, saving time and money.
- Panel design provides superior load and span capacities which often allow savings in the structural support system.
- Quick, economical trim packages include standard trim pieces that can be ordered by number.
- Panels can be crimp-curved for radius applications.
- High tensile steel panels in 29 and 26 gauge available with DuraTech™*nt* paint system.
- 24 through 18 gauge panels available with the DuraTech™5000 (Polyvinylidene Fluoride) coating system.

Reversed Box Rib (Recommended for roof application)

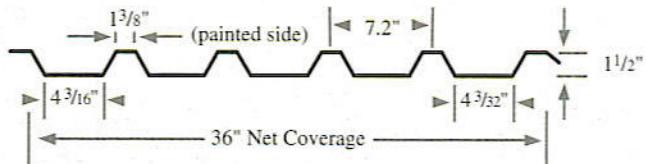

Box Rib Section Properties					
Gauge	Wt. (lbs/ft ²)	S+ (in ³ /ft)	I+ (in ⁴ /ft)	S- (in ³ /ft)	I- (in ⁴ /ft)
29	.69	.0376	.0440	.0367	.0350
26	.95	.0646	.0713	.0661	.0573
24	1.20	.1161	.1160	.1065	.0853
22	1.52	.1581	.1567	.1503	.1167
20*	1.83	.1984	.1933	.1892	.1467
18*	2.37	.2590	.2500	.2507	.2100

* 18 and 20 gauge supplied as G-90 galvanized.